

# MKF 1664 TS





## Electric combi oven with touch screen 16 trays 600 x 400 mm

### Plus

Patented fan guard system	Airflowlogic™
Patented system for direct steam	Humilogic™
Patented system for cooking chamber drying	Drylogic™
Available on request at the order	Voltage (V) : AC 220/230 3 Left side opening door
Humidity management software	
Wi-Fi communication system	
Knob for quick selection of the touch screen	
Programmable oven start	
N ° 40 recipes stored	
Control panel in 40 languages:	Arabic, Armenian, Azerbaijani, Bahasa (Indonesia), Bahasa (Malaysia), Bosnian, Bulgarian, Czech, Chinese, South Korean, Croatian, Danish, Philippine, Finnish, French, Georgian, Japanese, Greek, English, Icelandic, Italian, Kazakh, Lithuanian, Norwegian, Dutch, Persian (Iran), Polish, Portuguese, Romanian, Russian, Serbian, Slovenian, Spanish, Swedish, German, Thai, Turkish, Ukrainian, Hungarian, Vietnamese
HACCP system	
Adjustable door hinges	

Imagine having the most powerful pastry and bakery oven in the MILLENNIAL line in your hands.  
Imagine baking all your dishes at the same time in the 16 trays, heated evenly by 4 fans, distributed in height. Setting 500 recipes easily and as quickly as possible. Can you imagine it?  
So now is the time to actually do so.

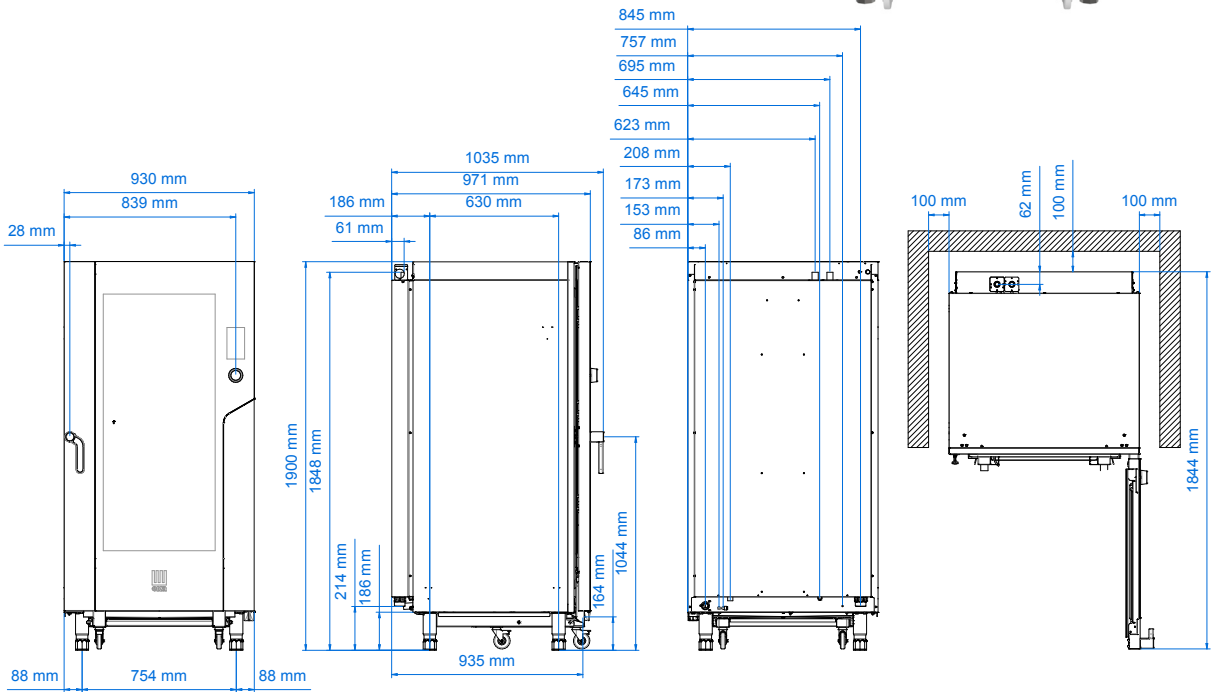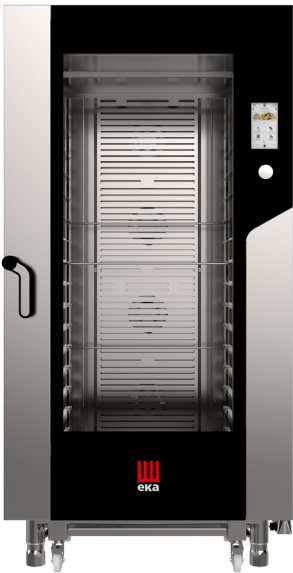

### Dimensional features

Dimensions (WxDxH mm)	930 x 1035 x 1900
Weight (kg)	244
Distance between rack rails (mm)	80

### Electrical features

Power supply (kW)	31
Frequency (Hz)	50/60
Voltage (V)	AC 380/400 3N
N° motors	4 bidirectionals
Boiler (kW)	/
Protection against water	IPX5

### Functional features

Power	Electricity
Capacity	N° 16 trays/grids 600 x 400 mm
Type of cooking	Semistatic + ventilated
Steam	Direct steam controlled by touch screen (10 levels )
Cooking chamber	AISI 304 stainless steel
Temperature	30 - 270 °C
Temperature control	2 Digital probe thermometer
Control panel	Touch screen
N° programs	500
Programmable cooking steps	10
Pre-heating temperature	180 °C
Pre-heating function	Programmable
Door	Right side opening Ventilated Inspectionable glass
Modularity	No
Feet	Adjustable

### Equipment

Cardboard box dimensions with pallet (WxDxH mm)	990 x 1090 x 2065 mm
USB port	
Multipoint core probe, cod. MKSCMU	
Plug for "vacuum cooking" probe cod. MKSCSV	
Automatic washing system integrated	
Hinge with door locking for openings adjusted at 60°, 90°, 120°, 180°	
Trolley with removable handle and braked wheels cod. EKCR 16 TC	

### Optionals

Aluminium tray 600 x 400 mm	KT9P/A
Perforated aluminium tray 600 x 400 mm	KTF8P/A
5 lanes perforated and corrugated aluminium tray 600 x 400 mm	KTF9P
5 lanes AISI 304 grid 600 x 400 mm	KG5CPX
Chromed grid 600 x 400 mm	KG9P
Condensation hood	MKKC 1620
Smoker	MKAF
Multi-point core probe	MKSCMU
Vacuum cooking core probe	MKSCSV
Support for core probe	MKSSC
Detergent and rinse aid	MKDET
Spray kit with support and tube	EKKD